



## CD-60DDI-KMC - Ductile Iron Gully Grates & Frames


### KEY FEATURES

- BSI Kitemark certified to BS EN124 2015
- Captive hinge design to deter thieves
- 3 Sided flange for installation against kerbs
- Dished grating



### CD-60DDI-KMC - Specifications

Product Weight (Kg)	13
Clear Opening	302 X 302
Overall Dimensions	400 x 362
Depth	75
Material	Spheroid Graphite Iron Grade EN-GJS-500-7 to BS EN 1563:2011 Temporary Bitumen based paint coating to BS 3416:1991
Load Rating	C250
Frame Pressure Bearing Area (N/mm <sup>2</sup> )	7.1
Application	Kerbside areas

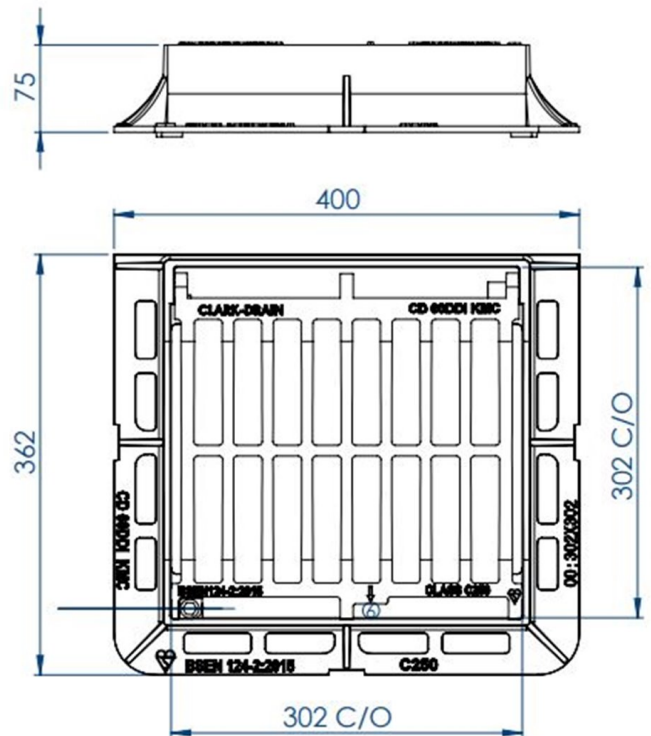

CD60DDIKMC/V0.1/31-05-2023

Due to our continuous product improvement program features and sizes may be subject to change without notice.

CLARK DRAIN, STATION ROAD, YAXLEY, PETERBOROUGH, PE7 3EQ, TEL. +44 (0) 1733 765317